


# QR READER INSTALL INSTRUCTIONS



- 1) Before installing a QR Reader you will have to install a Credit Card Reader to the crane.
- 2) Unbox the QR Parts and connect the wires as shown in the following images.

3) Disconnect the isolation interface adapter from the modem.

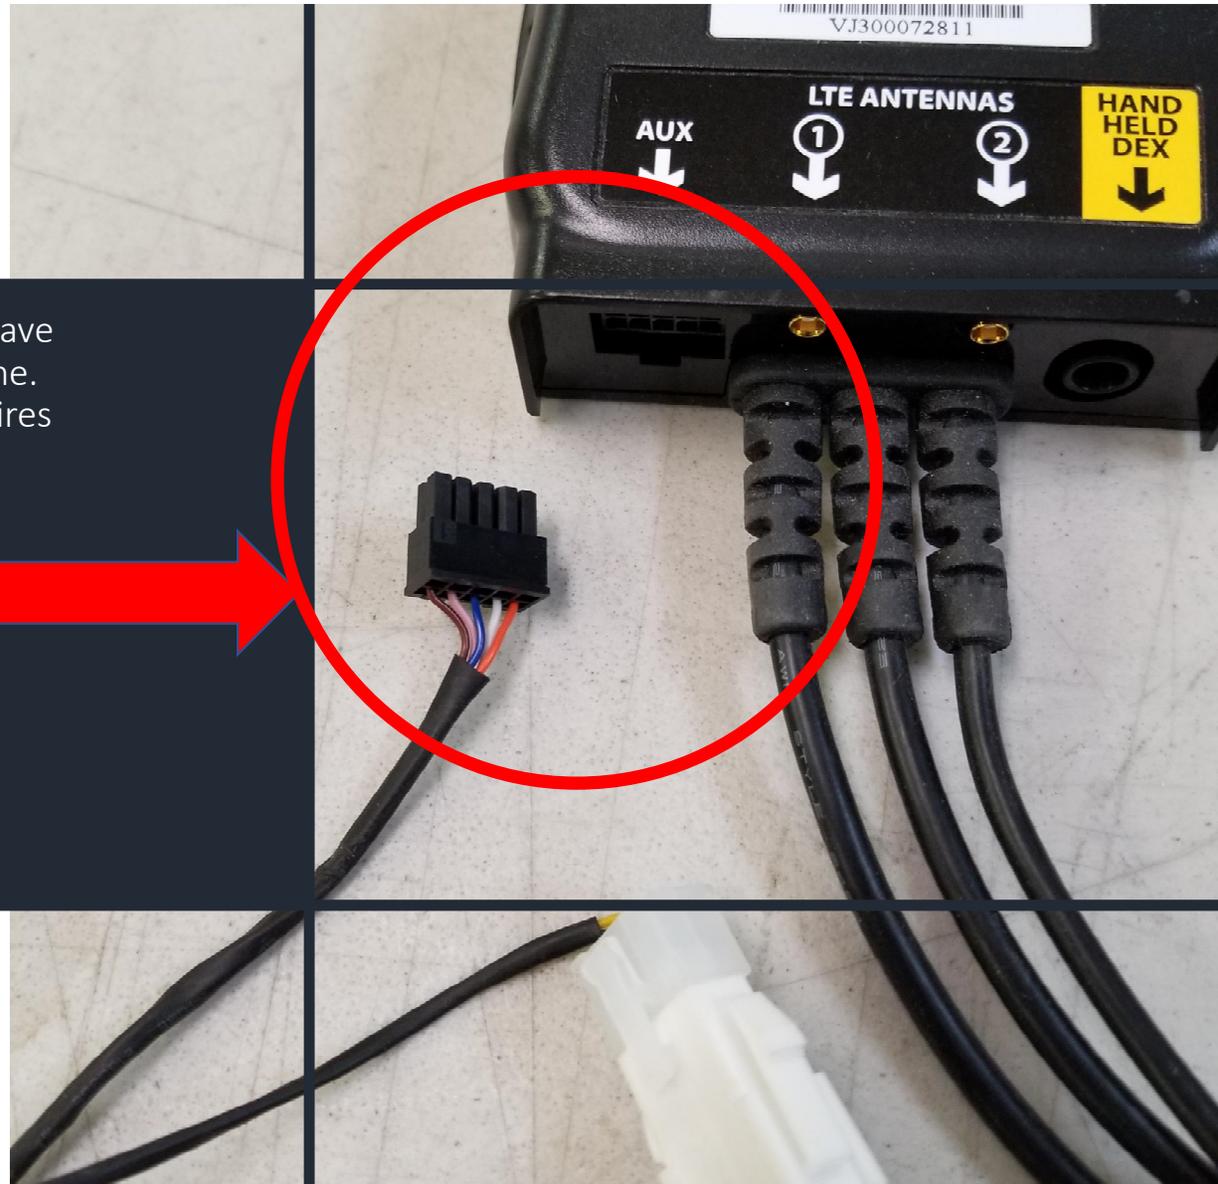


4) Connect the isolation adapter to the Breakout cable provided in the kit. Part# 0-100090-1



5) Connect the other end to the eport Modem.



6) Connect the serial ports together.

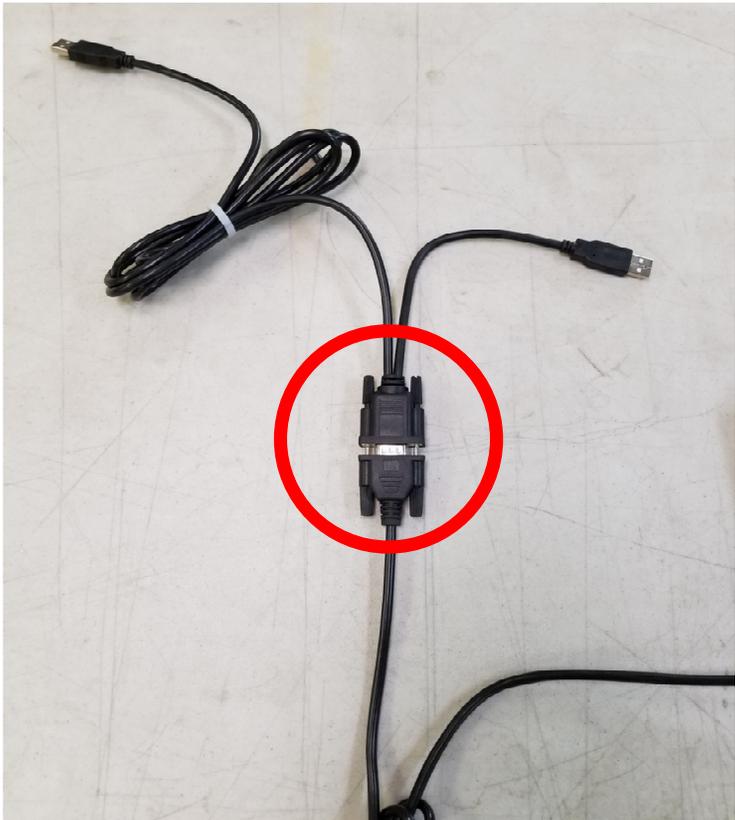

7) There is two USB sides that split off from the serial cable.  
The Short end goes to the Power cube.  
The Long end goes to the QR Scanner.

These must be plugged in correctly or the Scanner will not work properly.




Should look something like this after you have it wired inside the crane.


“Don’t forget to plug the Power Cube into the Utility Power Socket”



8) Remove the two Phillip screws located behind the front panel. Then move the wires out of the way to prevent drilling them.

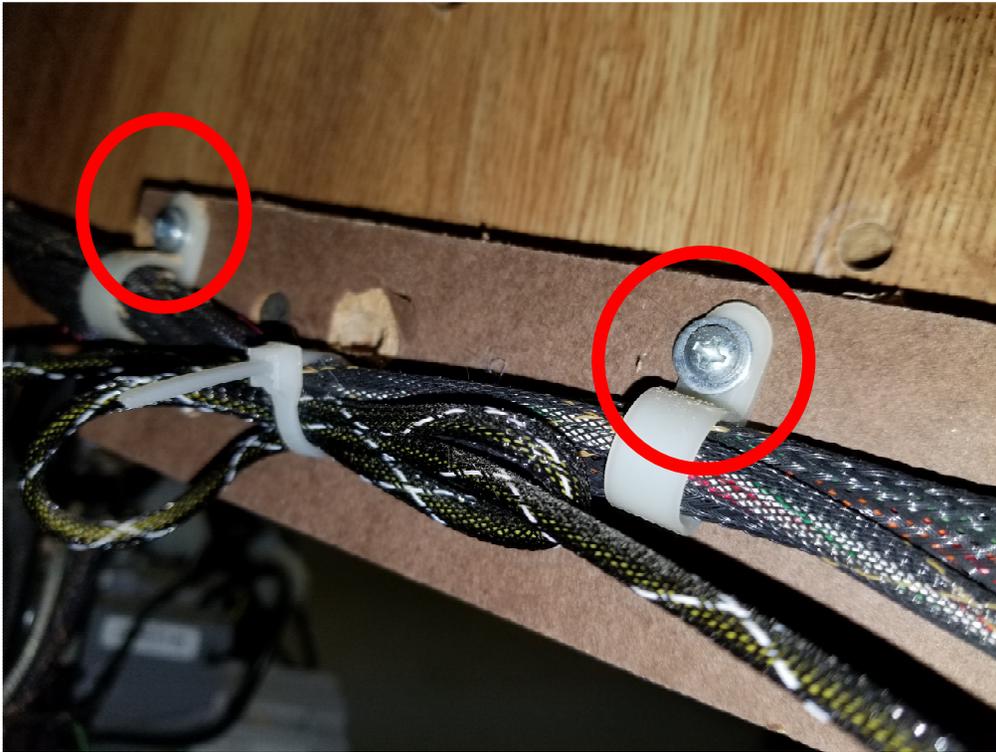


9) Use the template provided in the kit to drill the holes. Align the template to the top extrusion and the card reader.

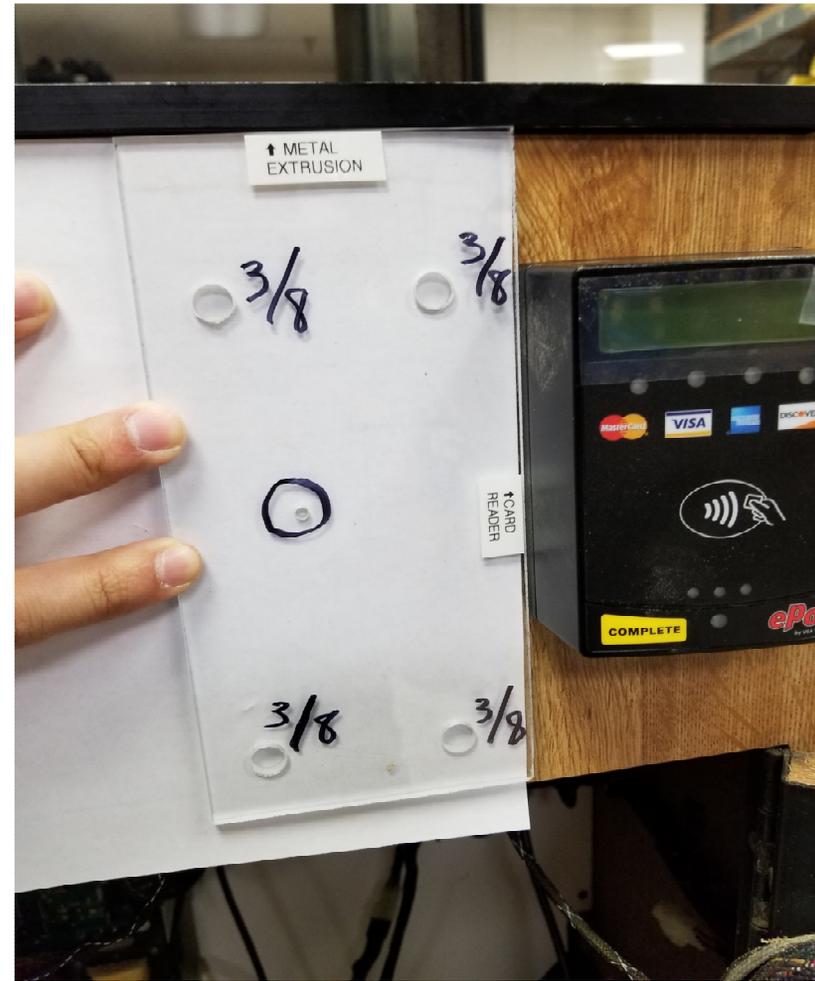

10) Use the bit provided in the kit to drill out the big hole. **Mark the hole by starting it with the bit. Then Drill halfway and then drill upward in a 45degree angle the rest of the way.** This will drill up into the toy floor a little bit. Its ok because you need the wiggle room for the USB Cable.

11) Drill the rest of the Holes with a 3/8 Bit.

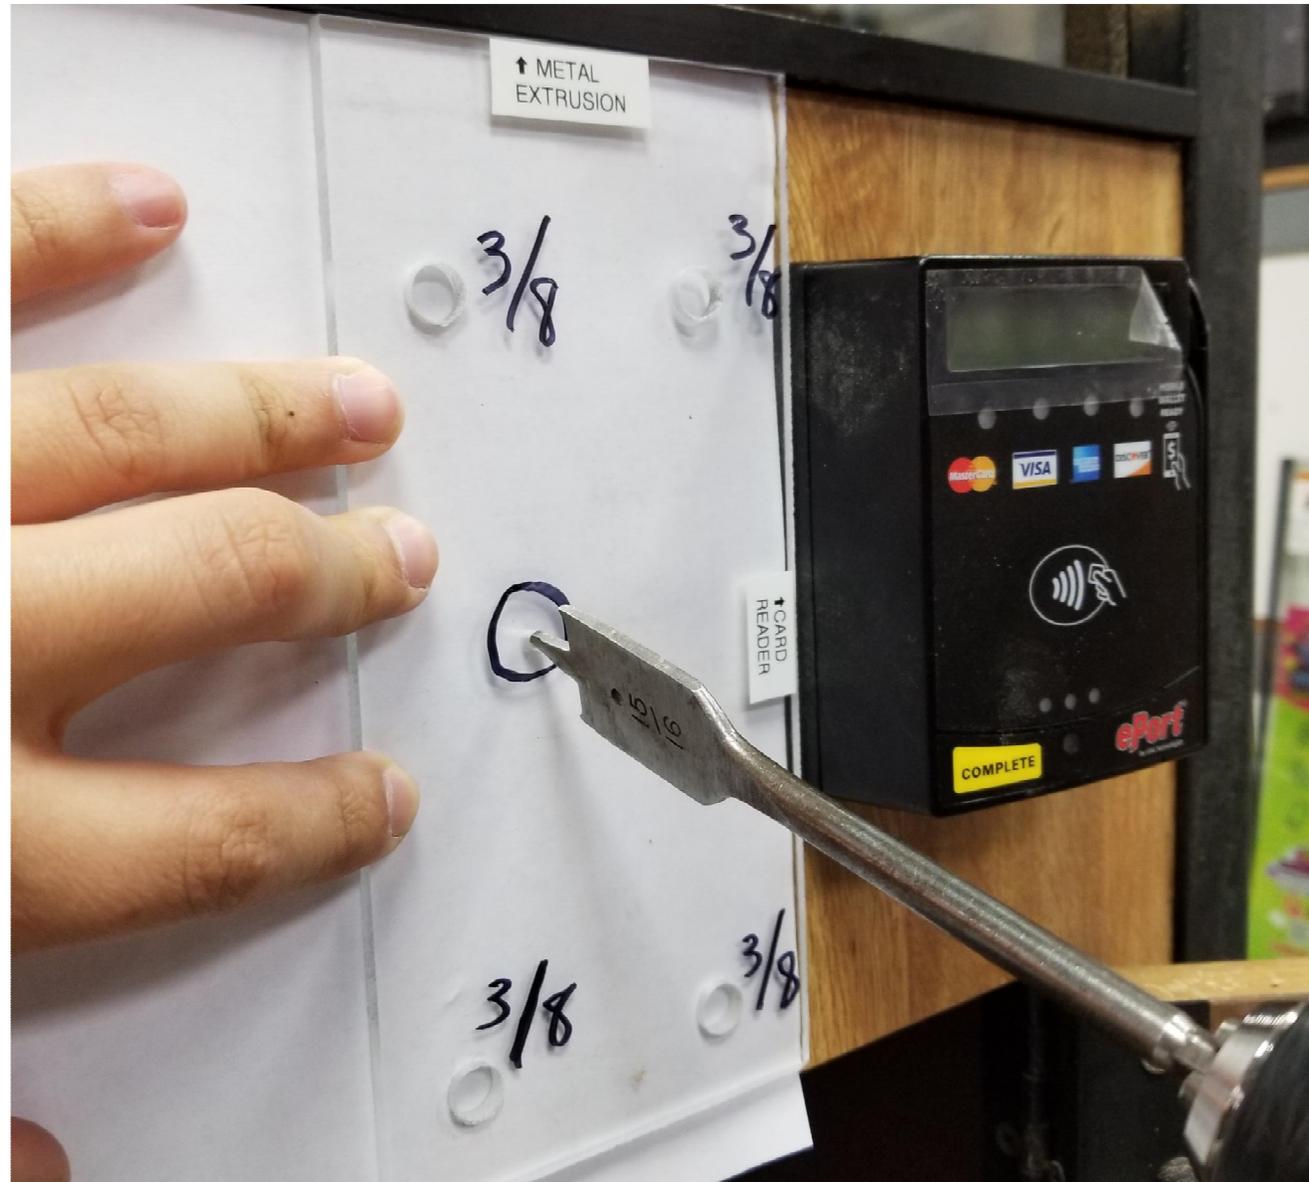

After you are done drilling you should have the following holes in the crane.


Front Panel



Toy Floor



Inside the Front Panel

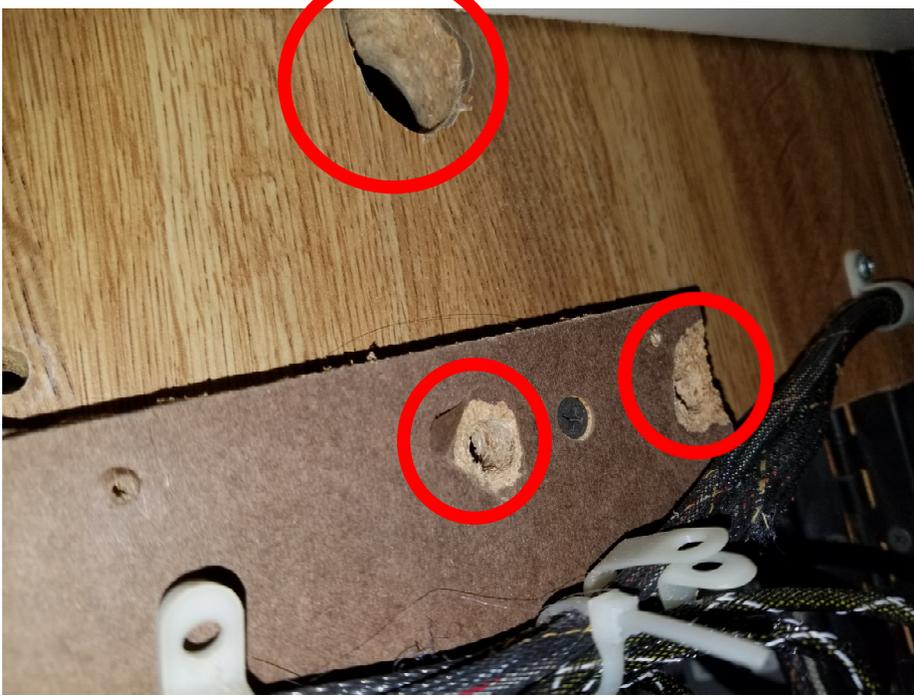

12)After drilling out the holes. Make sure you mount the harness back in place.



Feed the long end of the USB cable thru the hole and connect to the Scanner then slide it into the Metal housing.



Insert the housing into the four holes and mount with the screws provided in the kit.



After installing the QR Reader. Power up the machine and let the Card Reader boot up. Once the card reader can accept money. Press and hold the Service button for 10 seconds. Release the service button and the modem will reset. You will notice that the green and blue Led's turn on after a successful reboot.

